


Six finger clips

qztconn

启之泰

Technical Specs:
 Material: Beryllium copper (C17200)
 Rated current: 3A
 Contact resistance: Max.4mΩ

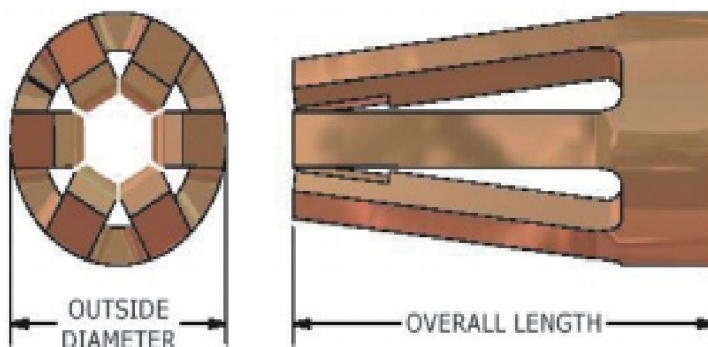

PART NO	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA	TEST PIN DIAMRTER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
QZT-2	0.711	1.524	.305-.432	0.381	250 GM	42 GM
QZT-3	0.787	1.524	.305-.483	0.381	60 GM	15 GM
QZT-1AS	1.118	1.575	.381-.584	0.432	150 GM	40 GM
QZT-1ASM	1.118	1.575	.381-.584	0.432	120 GM	20 GM
QZT-1A	1.118	2.108	.381-.660	0.432	90 GM	25 GM
QZT-1AL	1.118	2.108	.381-.660	0.457	42 GM	15 GM
QZT-1ALX	1.118	2.108	.381-.660	0.457	20 GM	10 GM
QZT-051	1.27	2.108	.635-.889	0.66	140 GM	25 GM
QZT-052	1.321	2.108	.635-.940	0.66	375 GM	100 GM
QZT-052L	1.321	2.108	.635-.940	0.66	125 GM	40 GM
QZT-4	1.397	1.651	.940-1.092	1.016	160 GM	50 GM
QZT-5	1.727	2.159	1.016-1.270	1.016	300 GM	75 GM
QZT-8	3.17	3.048	2.134-2.591	2.632	600 GM	150 GM

NOTE: *-SIZING PIN DIAMETER IS 0.533